



EQUUS WATERPROOFING ACCESSORIES 2025













ROOFING | TANKING | INSULATION | FLOORING | COATINGS | CONCRETE REPAIR







All projects that require a materials warranty must be completed using accessories supplied by Equus Industries Ltd. Any variation could result in the warranty not being issued at the completion of the project, unless prior written approval by an Equus Technical Consultant has been obtained.

Equus Industries will regularly assess their accessory portfolio to ensure the best options available globally are in the range and will work with the client to offer the best solution.

Equus Industries endeavors to have sufficient stock levels available at all times, although placing orders as early as possible is recommended. Please call your local Equus branch for technical support.

Thank you for your support,
The team at Equus Industries Ltd.





Contents

Roofing Accessories		4
SOPREMA Shrink Sleeve SOPREMA Bitumen Angle Fillets SOPREMA EASY FOAM SOPREMA SOPRASPRAY SOPREMA DUO Slates	Unifix PermaBase DEK Georgia-Pacific DensDeck Kraitec Step SOPREMA ALSAN FLASHING QUADRO SOPREMA ALSAN FLEECE 110 P	SOPREMA ALSAN FLASHING SOPREMA POLYFLEECE SOPREMA EASY FLASHING Tremco Matacryl Thix SOPRASOLAR FIX EVO TILT System
TPO Accessories		9
Equus TPO Adhesive SOPREMA Flexocol A89 Adhesive Citrus Cleaner SOPREMA TPO Walkway Mat	SOPREMA TPO Walkway Supergrip SOPREMA Pre-punched Galvanised Bar SOPREMA Bar Protection End SOPREMA Flagmetal Sheet	SOPREMA Perimeter Profile SOPREMA Strip/Termination Strip SOPREMA Vapour Aerator/Pipe Collar/ 90° Internal/External Corners
Fixplus		11
Full range of size available on request		
Sealants		12
SOPREMA ALSAN MASTIC 2200 SOPREMA CHEM LINK M-1® SOPREMA SOPRASEAL	Tremco Dymonic 100 Tremco Dymonic FC Tremco Tremflex 834	Equus Backer Rod
Waterstops & Drainage		14
Schomburg Aquafin CJ6 Schomburg Aquafin CJ4	Equus Swellseal Equus Drainage & Protection Mat	
Termination Bars		15
SOPREMA C-Profile Equus Termination Bar	WMAI M.A. Drip Edge SOPREMA Duo Edge Trim	SOPREMA Duo Edge Trim Internal and External Corner
Cleaners		16
Equus Delta Force + Nano Equus Ferroclean	Equus Mosskill Equus Xylol	Tremco Matacryl 405
Guardian Fasteners & Tools		17
RBS50 Tubes R75 Tubes ASTL75 Tube & Screw Combo SP-70-S4 Plate	SP-8240-S4 Plate Screws for Concrete, Metal and Plywood PIR & Concrete Drill Bit	Drill Bit Extenders Screw Bit Screw Bit Extenders
SealBoss Concrete Solutions		19
1510 Waterstop Foam 1570 Flexible Waterstop Foam FlexGel ² R70 Pump Flush Injection Packers 4500F Epoxy Paste	4040LV Epoxy Resin Surface Ports 4500 Epoxy Gun 4040 Epoxy Cartridge Gun Polyurethane Hand Operated Gun Static Mixers	P2002 Drill Pump P3003-2C Injection Pump Parts and Accessories P2002 Hose P3003 Pressure Hose
Goss Torch Range		22
Proflame Torch Kit AP-140M Large Torch AP-45 Small Torch HEF-25 Propane Hose	EP-80G Gas Regulator BPC-6 Torch Head BPC-5 Torch Head MP-1 Striker	MP-2-5 Flint Refill Torch Stand Quick Fix Cuppling
Outlets		25
Aquaknight Membrane Roof Drains Aquaknight Membrane Deck Drains	Aquaknight Stainless Steel Drains Roof Sump Outlet and Overflow	
Scuppers & Vents		26
Short Roof Vent Stainless Steel Scupper	Plastic Scupper Plastic Overflow	





ACCESSORIES

Equus holds and sources a range of roofing accessories to compliment their roofing membranes.

If you cannot find what you are looking for please contact your local consultant to discuss your project requirements.







Roofing Accessories

Shrink Sleeve

Combines a PVC sleeve, flange and base to create a professional and innovative accessory to make flat roof penetrations watertight. Shrinks when heated with hot air or flame.

Supplied in: • 22mm - 110mm PVC diameter





Bitumen Angle Fillets

Pre-fabricated, triangular angle fillet of rubber modified bitumen. For use between horizontal and vertical parts and details. It is compatible to all De Boer waterproofing membranes.

Supplied in: • 1.2m Strip



Easy Foam

Rapid curing, gun-grade polyurethane adhesive developed to bond insulation to vapour barriers and bituminous waterproofing membranes.

Supplied in: • 750ml Can • Application gun available and sold separately





Sopraspray

Solvent-based primer in an easy to use can, designed for detailing, metals and small interventions. A quick drying pre-treatment to ensure optimal adhesion of the waterproofing membrane.

Supplied in: • 600ml Can





Duo Slates

Mineral Chip used to scatter over membrane joints for a uniform appearance.

Colours: • GW (Grey White) • WGG (White, Grey, Green) • NOIR (Black)

• BO (Brown Oxide)

Supplied in: • 5kg Pail • 30kg Bag







Roofing Accessories

PermaBase DEK

Light weight, easy to cut and fasten Roof Board that is very durable and will not rot, swell or disintegrate in the presence of moisture. Used to protect the PIR insulation of a warm roof system in heavy traffic areas.

Supplied in: • 1200mm x 2400mm Board Thickness 12.7mm (1/2 inch)





DensDeck

DensDeck Roof Boards have proven their toughness and versatility. The unique construction has been shown to withstand delamination, deterioration, warping and job site damage far more effectively than paper-faced gypsum board and other conventional roofing products such as wood fiberboard and perlite.

Supplied in: • 1200mm x 2400mm Board Thickness 12.7mm (1/2 inch)






Kraitec Step

A rubber granulate tile specifically designed for protection of waterproofing membranes on flat roofs (e.g. walkways for roof maintenance), balconies and terraces.

KRAITEC step is also used as a supporting underlay under systems installed on roofs (e.g. solar power units, antennas, etc.).

Supplied in: • 500mm x 500mm, 30mm high per tile





Alsan Flashing Quadro

A single-component, root-resistant polyurethane resin for waterproofing roof junctions and details. Easy to prepare with no catalyst needed, its thixotropic consistency ensures simple application without primers on surfaces like concrete, wood, bitumen, PVC, and many metals. Ideal for high-end projects and maintenance, including termination flashings and penetration details. Compatible with Soprema mineral and sand-finished membranes. Recommended for use with Equus Soprema Duo Membranes.



SOPREMA Supplied in: • 5kg Pail



Alsan Fleece 110 P/165 P

A non-woven polyester fleece, that is designed for use with ALSAN FLASHING QUADRO waterproofing resin. It acts as reinforcement, ensuring a minimum resin thickness for optimal performance. Together, they form a high-quality, flexible, and crack-bridging waterproofing system, delivering durable and reliable protection.

Supplied in: • 300mm Width x 50m Roll







Roofing Accessories

Alsan Flashing

A single-component polyurethane/bitumen resin for cost-effective, easy application. Suitable for roofing, decks, and underground waterproofing, it is perfect for termination flashings, penetrations, upstands, and maintenance. Compatible with Soprema bitumen membranes, as well as concrete, plywood, CLT, timber, masonry, metal, and PVC pipes. Not suitable for use on TPO.







Polyfleece

A non-woven polyester reinforcement designed for use with ALSAN FLASHING products. It is applied in combination with ALSAN FLASHING products in various areas, including general roofing, green roofs, planter boxes, and foundations, to enhance durability and performance.

Supplied in: • 150mm Width x 30.4m Roll





Easy Flashing

A single-component, water-based bituminous coating with excellent adhesion, even at low temperatures. Suitable for waterproofing, protecting, and sealing cracks on surfaces like plywood, metal, and cement. It can be applied with or without reinforcement (POLYFLEECE or Equus Fibreglass) and is ideal for renovating bitumen, metal, ceramic tile, and butyl rubber membranes when paired with an Equus topcoat. Compatible with Soprema bitumen membranes for roof detailing. Formerly known as SOPREMA Easygum.





SOPREMA Supplied in: • 310 ml Cartridge • 5kg Can • 20kg Can

Matacryl Thix

Highly elastomeric, thixotropic liquid waterproofing membrane system designed to be simple to apply, and highly flexible with excellent crack-bridging characteristics. Used in conjunction with Chevaline Dexx Topcoat for membrane detailing.

Please consult an Equus representative for best areas of use.

Supplied in: • 25kg Drum • 2kg Pack









A unique system for mounting solar energy solutions on bituminous and TPO waterproofing... and more!

Advice must be sought from Equus for each project in order to ensure that the solution is suited to the needs of the building.



*Full range of sizes and accessories available on request



TPO Accessories

Equus TPO Adhesive

A natural rubber based, plasticiser resistant contact adhesive formulated bonding. TPO and EPDM roofing membranes to substrates. An excellent choice for permanent bonding of TPO, EPDM and most other roofing membranes to a variety of substrates and is also suitable for a wide variety of applications involving laminating of plastic materials.

Supplied in: • 17kg Recyclable Canister



Flexocol A89 Adhesive

Mono-component adhesive formulated with polyurethane, liquid with medium-low viscosity, moisture-curing, with controlled expansion. FLEXOCOL A89 is used for bonding of membranes FLAGON TPO or FLAGON PVC coupled to geotextile on horizontal surfaces.

Supplied in: • 12kg Can





Citrus Cleaner

A high performance natural citrus based cleaner and degreaser formulated for removing a variety of adhesives and contaminants. Removes tape residue, cleans guns & tips, removes adhesive overspray, removes grease & tar, cleans up uncured adhesives, removes crayon & waterproof markers, removes dirt & scuff marks.

Supplied in: • 575ml Can



TPO Walkway Mat

A membrane composed of modified polyolefin (TPO) and a polyester reinforcement. Used as an anti-slip finish. The membrane is distinguished by a very high resistance to weathering and UV-rays.

The top has an embossed structure.

Supplied in: • 15m x 1m Roll





TPO Walkway Supergrip

A non-reinforced protective sheet for walkways on roofs in combination with Flagon TPO/FPO roofing membranes. With embossed fishbone pattern.

Supplied in: • 15m x 0.76m Roll







TPO Accessories

Flagon Pre-punched Galvanised Bar

Supplied in: • 2m Length

Flagon Bar Protection End

Supplied in: • 10cm Length 3.5cm Diameter



Flagmetal Sheet

A modified polyolefin (TPO) membrane bonded to a galvanised steel sheet. FLAGMETAL is used for the realisation of custom made finishing elements of a roof such as flashings and profiles. It is distinguished by a high resistance to weathering and UV-rays.

Supplied in: • 2m x 1m Sheet





Flagmetal Perimeter Profile

Supplied in: • 10.5cm x 5cm x 3m Length





Flagmetal Strip / Termination Strip

Supplied in: • 5cm x 2cm x 2m Length • 7cm x 2cm x 2m Length





Flagon Vapour Aerator

Supplied in: • 240mm

Flagon Pipe Collar

Supplied in: • 80mm • 100mm

Flagon 90° Internal/External Corners













Fixplus Pedestal & Tile Support System

The Fixplus range consists of a series of pedestals for raised floor applications. Fully customisable to be compatible with multiple flooring materials, they are suitable for decking systems such as ceramic and natural stone tiles, and aluminium or wooden beams.

The pedestals come in a range of adjustable heights, basic or self-levelling, and with a range of accessories.

*Full range of sizes and accessories available on request



Sealants

Equus Industries offers Sealants for nearly all situations within the construction industry.



Alsan Mastic 2200

Black bituminous adhesive/sealant with permanent flexibility for superior adhesion. The bitumen provides very good UV resistance, fire resistance and extreme elasticity. Can also be used as a cold glue. Can be used on all SOPREMA Bitumen membrane systems where it is not exposed to the weather.





Supplied in: · 300ml Cartridge · 600ml Sausage

Chem Link M-1®

A moisture curing, polyether adhesive/sealant designed for making joints, cracks and connections air and watertight, for applications in damp, dry, or cold climates. It is solvent free and contains no isocyanates. Can be used on all SOPREMA bitumen membrane where it is exposed to the weather.





Supplied in: • 300ml Cartridge

Sopraseal Sealant

A fast-setting, moisture curing, low VOC, solvent-free, polyether adhesive-sealant. A bitumen compatible sealant.

Supplied in: • 600ml Sausage





Dymonic 100

Highly versatile, high performance polyurethane sealant formulated to be durable and flexible with excellent adhesion in moving joints. Also has a unique capability to adhere to damp or green concrete. A facade or joinery sealant.

Supplied in: • 600ml Sausage



TREMCO.

Dymonic FC

Highly versatile, high performance, modified polyurethane sealant formulated to be durable and flexible with excellent adhesion in moving joints. A concrete panel sealant.

Supplied in: • 600ml Sausage











Tremflex 834

Single component waterborne siliconized acrylic sealant formulated to give the right balance of hardness and flexibility with excellent UV resistance. Used on exposed areas where polyurethane may react with other components.

Supplied in: • 300ml Cartridge • 600ml Sausage



TREMCO.

Backer Rod

Closed cell polyethylene foam used as a backing filler in control joints or similar applications.

Supplied in: • 6mm - 50mm diameter • 25m - 50m rolls








Waterstops & Drainage

For that extra protection in tanking situations, if you're not sure which one suits your installation just give your local Consultant a call.



Aquafin CJ6

Thermoplastic expansive waterstop for the internal waterproofing of construction joints in concrete construction, where there is a constant or Intermittent exposure to ground water, run-off water or surface water.

Supplied in: • 25m Roll • 40m Roll





Aquafin CJ4

Universally applicable bentonite joint waterstop with patented rain protection coating used for the waterproofing of construction joints being permanently or intermittently subject to ground, slope and surface water.

Supplied in: • 20m Roll






Swellseal

High performance, single component, polyurethane based liquid waterstop designed to create a compression seal within construction joints, blocking water entry. It is a versatile, gunnable waterstop that swells up to 350% in volume when in contact with water.

Supplied in: • 600ml Sausage





Equus Drainage & Protection Mat

Nodular sheet composed of high density polyethylene and a non woven geo textile, designed as a drainage and protection layer of underground walls and slabs. Can also be used as a drainage layer for planters and roof gardens.

Supplied in: • 15m x 2.1m Roll







Termination Bars

Our termination bars are compatible with all of our membranes and can be adapted to most installation requirements.



C-Profile

Pre-manufactured profile that terminates the waterproofing membrane at the wall in a professional and watertight, wind-peel resistant manner. Used for concrete or wooden walls and curbs.

Supplied in: • 2.5m Lengths • 10 Lengths/pack



M.A. Drip Edge

Made from the finest 2mm Aluminium. The design means a straight edge every time. The angle prevents warping or twisting. The pre-drilled holes mean quicker fixing with no drill swart to get into the membrane detailing.

Supplied in: • 3m Lengths • 5 Lengths/pack



Duo Edge Trim

110/60 Aluminium edge trim used to define straight and clean lines around the roof perimeter for aesthetic appeal.

Supplied in: • 2.5m Lengths • 10 Lengths/pack






Duo Edge Trim Internal and External Corner

110/60 Aluminium corner edge trim used to define straight and clean lines on the internal/ external corner perimeter for aesthetic appeal.

Supplied in: • 490mm x 490mm




Equus Tanking Termination Bar

A pre-manufactured profile that terminates the waterproofing membrane at the wall in a professional and watertight, wind-peel resistant manner with the addition of 50 mm flange for securing drainage board. Used in tanking situations where backfill covers membrane and termination bar.

Supplied in: • 2.4m Lengths









Cleaners

Equus manufacture different cleaners and protectors for their membranes and others.



Delta Force + Nano

Highly concentrated cleaner, degreaser and traffic film remover. Designed to be heavy duty and safe to use on paintwork and other surfaces.

Supplied in: • 5L Flagon



Ferroclean

Mildly acidic paste for removing rust from ferrous metals and rust stains from many other surfaces.

Supplied in: • 4L Flagon • 10L Pail



Mosskill

For neutralisation of most mosses, moulds and algae growth on common building surfaces. Can also be used as a penetrating inhibitive treatment before overcoating with waterborne Equus coatings.

Supplied in: • 1L Flagon • 4L Flagon • 20L Jerrican



Xylol


Solvent-based thinners for most coating products and cleaner for most tools.

Supplied in: • 1L Can • 4L Can • 20L Pail



cleaning agent for most tools.

Supplied in: • 4kg Can • 18kg Drum

















Fasteners & Tools

A wide variety of fasteners, fastening plates and associated tools for Roof boards, PIR and membranes.



RBS50 Tubes

High performance tube to be used in conjunction with screws for mechanically fastening thermal insulation and the bitumen roofing membrane.

Supplied in: • Sizes range from 20mm - 330mm



GUARDIAN

R75 Tubes

Standard tube to be used in conjunction with screws for mechanically fastening thermal insulation prior to the installation of the self adhesive bitumen roofing membrane.

Supplied in: • 60mm • 80mm



GUARDIAN

ASTL75 Tube & Screw Combo

Telescopic tube and screw for mechanically fastening tapered thermal insulation on concrete roofs.

Supplied in: • Sizes range from 70/90mm - 340/460mm



GUARDIAN

SP-70-S4 Plate

Metal pressure plates to be used in conjunction with screws for mechanically fastening thermal insulation.

Supplied in: • 70mm diameter



GUARDIAN

SP-8240-S4 Plate

Metal pressure plates to be used in conjunction with screws for mechanically fastening through base sheet.

Supplied in: • 82 x 40mm



GUARDIAN





Screws

High performance screws to be used in conjunction with tubes or plates for mechanically fastening of thermal insulation or bitumen roofing membrane.

Supplied in:

- CS61 for concrete
- BS61 for metal
- BSRF48 or EDS-SRB48
- for plywood
- Sizes range from 50mm 120mm
- Sizes range from 100mm 150mmSizes range from 50mm 120mm



GUARDIAN

PIR & Concrete Drill Bit

Drill bit tool for mechanically fastening thermal insulation and bitumen roofing membrane.

Supplied in: • 35mm Bit Lengths • 45mm Bit Lengths • 55mm Bit Lengths



GUARDIAN

Drill Bit Extenders

Extension arm tool for drill bits for mechanically fastening thermal insulation and bitumen roofing membrane.

Supplied in: • 300mm Lengths • 500mm Lengths



GUARDIAN

Screw Bit

Screw bit tool for mechanically fastening thermal insulation and bitumen roofing membrane.

Supplied in: • Torx-M6 • Phillips



GUARDIAN

Screw Bit Extenders

Extension arm tool for screw bits for mechanically fastening thermal insulation and bitumen roofing membrane.

Supplied in: • 300mm Lengths • 750mm Lengths



GUARDIAN



SealBoss

A wide variety of water stop and leak sealing injecting foams and chemical grouting product solutions.



1510 Waterstop Foam

A hydrophobic water-activated, water cut-off grout and foam seal grout based on a MDI polyurethane. The resin is 100% solvent free and 100% solids. Must be used in conjunction with SealBoss 15x Accelerator. Upon contact with water 1510 reacts to a semi flexible foam while expanding its volume 30 to 40 times.

Supplied in: • 20L Pail • 15x Accelerator 2L Tin



1570 Flexible Waterstop Foam

A hydrophobic water-activated, water cut-off grout and foam seal grout based on a MDI polyurethane. The resin is 100% solvent free and 100% solids. Must be used in conjunction with SealBoss 15x Accelerator. Upon contact with water 1570 reacts to a very flexible foam while expanding its volume 6 to 25 times.

Supplied in: • 20L Pail • 15x Accelerator 2L Tin

SealBoss

SealBoss \$ 1570 Market Market SealBoss \$ 1570 Market Market SealBoss \$ 1570 Market Mar

FlexGel²

A single component hydrophilic polyurethane grout. The product is capable of incorporating large amounts of water that are multiples of its own mass, thereby forming a waterproofing gel. The cure time of the product is determined by the amount of water added and the temperature.

Supplied in: • 20L Pail

SealBoss Concrete Solutions

R70 Pump Flush

Solvent-free SealBoss pump cleaner and conditioner. Not aggressive for rubber and plastic parts and is safer for the pumping equipment. It offers many advantages over solvents on the jobsite for health and safety purposes.

Supplied in: • 20L Pail





Injection Packers

Designed to safely and securely connect your Injection Equipment to the concrete substrate, in order to deliver the injection chemical resin – often under high injection pressures – to the area of repair.

Supplied in: • 115mm length • 200mm length









SealBoss Range

Full range of crack injection and accessories available.

4500F Epoxy Paste

A 2-component, 100 % solids, high-strength, moisture-tolerant, structural, high modulus epoxy paste adhesive gel designed for placement of epoxy injection surface mounted ports, surface sealing of cracks in concrete and for use as an epoxy mortar binder. 4500 F meets ASTM C-881 Types I, II & IV, Grade 3, Classes B & C.



SealBoss

Supplied in: • 8L Can • 650ml Cartridge

4040LV Epoxy Resin

A 100% solids, himod, 2-component, moisture-tolerant, low-viscosity, high strength, multipurpose, epoxy injection resin adhesive designed for high strength repairs, epoxy injection and epoxy crack injection in concrete substrates such as floors, ceilings, walls, foundations and more. The epoxy adhesive can also be used for wood.



SealBoss

Supplied in: • 40L Pack • 6L Pack • 400ml Cartridge

Surface Ports

Surface ports are designed to cover typical application conditions including smooth, rough and uneven concrete surfaces, corner injection and high pressure epoxy injection.



SealBoss

4500 Epoxy Paste Gun

Hand held dual cartridge injection gun.



SealBoss

4040 Epoxy Cartridge Gun

Hand held dual cartridge injection gun.



SealBoss

Polyurethane Hand Operated Gun

A powerful and versatile injection hand pump suitable for small jobs and as a low cost back-up system. Very reliable and easy to maintain.



SealBoss



SealBoss Range

Full range of crack injection and accessories available.

Static Mixers

Available in a range of sizes for epoxy paste and crack injection products.





P2002 Drill Pump

This extremely lightweight and powerful injection pump can be used for most of the SealBoss® polyurethane injection line products with viscosities between 10 and 1000 cps. Suitable for mid-size jobs and daily use this is the perfect machine for waterproofing contractors performing commercial work and residential injection.





P3003-2C Injection Pump

The P3003-2C Injection Pump features a compact and sturdy design with integrated hoppers and stand. This lightweight and powerful injection pump can be used for dual component epoxy and/or polyurethane injection resin with viscosities between 10 and 1000 cps.





Parts and Accessories


A wide range of parts and accessories for various pumps.





P2002 Hose

Economic single component applicator hose set for use with zerk coupler and slide coupler/button head connector. Standard equipment for drill operated single component injection machine.







P3003 Pressure Hose


Heavy duty single component high pressure applicator hose.

Supplied in: • 3m







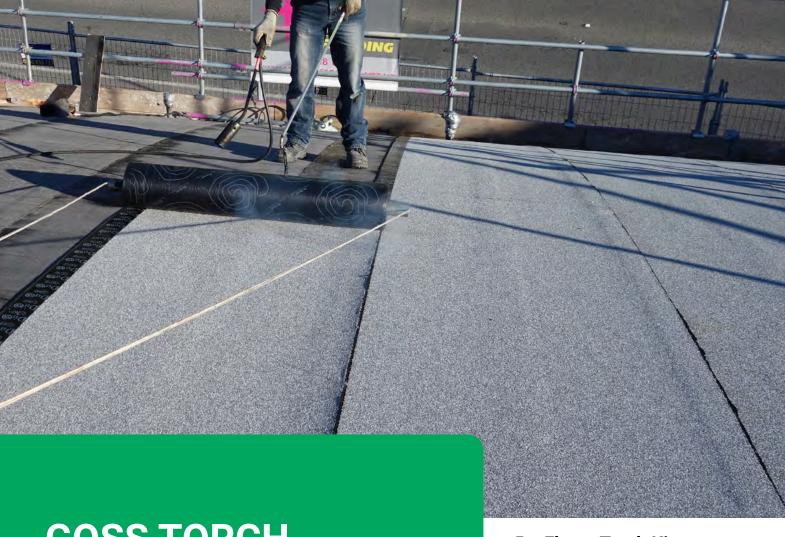

GOSS TORCH RANGE

For reliability and cost effectiveness we stock and supply the Goss torch range to New Zealand. From full kits to spare parts. This range of torches very popular overseas and here in New Zealand.

ProFlame Torch Kit

Professional propane torch kit for membrane roofing systems.

Includes: • AP-140M Large Torch

- AP-45 Small Torch





Goss Torch Range

AP-140M Large Torch

Professional propane torch for membrane roofing systems, with push button ignition tip, adjustable flame and torch stand.

Supplied in: • 66cm length with 55mm diameter tip





AP-45 Small Torch

Professional propane torch for membrane detailing, with push button ignition tip, adjustable flame and torch stand.

Supplied in: • 35cm length with 35mm diameter tip





HEF-25 Propane Hose

Propane hose with connections.

Supplied in: • 7.5m length





EP-80G Gas Regulator

Gas regulator with adjustable gas flow.





BPC-6 Torch Head

Replacement head with igniter for large propane torch.

Supplied in: • 50mm diameter







Goss Torch Range

BPC-5 Torch Head

Replacement head for small detail propane torch.

Supplied in: • 35mm diameter





MP-1 Striker

Striker with flint for igniting propane torches.





MP-2-5 Flint Refill

Replacement flints for Goss striker for propane torches.

Supplied in: • 5 per pack





Torch Stand

Replacement torch stand.





Quick Fix Cuppling

Made of a durable heat resistant brass so it can withstand intense temperatures.







Outlets

Equus Industries partners with local manufacturers to ensure we can offer a full range of Outlets, Overflows, Scuppers and Drains to the New Zealand construction industry.



Membrane Roof Drains

Supplied in: • 100mm Inlet 80mm Outlet

- 100mm Inlet 100mm Outlet
- 150mm Inlet 150mm Outlet

All Roof Outlets can be installed as a drain or overflow. Multiple size options, and side exit outlets also available on request.



Membrane Deck Drains

Supplied in: • 100mm Inlet 80mm Outlet

• 100mm Inlet 100mm Outlet

Multiple size options, and side exit outlets also available on request.



Stainless Steel Drains

ROOF DRAIN

Supplied in: • 80mm Inlet 80mm Outlet

- 100mm Inlet 100mm Outlet
- 150mm Inlet 150mm Outlet

DECK DRAIN

Supplied in: • 80mm Inlet 80mm Outlet

• 100mm Inlet 100mm Outlet

All Roof Outlets can be installed as a drain or overflow.

Some other size options available on request. Stainless steel range is Declare Label Listed and Red List Free.

AQUAKNIGHT

Roof Sump Outlet and Overflow







Drain Grate



Overflow Grate & Hat



Assembly















Scuppers & Vents If you can not find what you are looking for in

If you can not find what you are looking for in here please contact you local Consultant for more information. If they have it we can get it.



Short Roof Vent

	100mm
Flange Diameter	280
Downpipe Diameter	100
Cap Height	55
Total Height	110

Compatible with all Equus waterproofing membrane systems.





Stainless Steel Scupper 200mm x 75mm

Face Height	150
Face Width	350
Outlet Length	400
Aperture Height	75
Aperture Width	200

Compatible with all Equus waterproofing membrane systems.





Plastic Scupper 200mm x 75mm

Face Height	150
Face Width	350
Outlet Length	400
Aperture Height	75
Aperture Width	200

Compatible with Equus Chevaline Dexx membrane and Equus TPO membrane systems only.





Plastic Overflow 200mm x 75mm

Face Height	200
Face Width	320
Outlet Length	400
Aperture Height	75
Aperture Width	200

Compatible with Equus Chevaline Dexx membrane and Equus TPO membrane systems only.





^{*}Full range of sizes available on request. *All measurements in mm.



Equus Industries provides technical waterproofing solutions for Architects, Engineers, Property Managers, and Contractors in the building industry. One system does not fit all. Equus can provide complete solutions, systems, specifications, technical support and warranties.

Equus Southern

Unit 6/100 Fitzgerald Ave, Christchurch

> PO Box 19 846 Christchurch

Ph: 03 353 2434

southern@equus.nz

Equus Central

45 Hutt Rd, Petone, Wellington

PO Box 38 636 Wellington Mail Centre

Ph: 04 576 0333

central@equus.nz

Equus Northern

211 Archers Rd, Wairau Valley, Glenfield, Auckland

PO Box 101 423 North Shore Mail Centre

Ph: 09 415 4314

northern@equus.nz

Product Partners:



















